

LR-P-2000 -927-10S-BK-15-TB-G1

LINEARlight Rigid FINESSE |



Caractéristiques produit

- Slim, modular LED fixture for linear applications, fully customizable
- Several optics, Wall Grazing and WallWashing; 10°, 30°, 60°
- Outdoor IP67 or Indoor IP43 versions available
- Large operating temperature range: from -30 ° to +50 ° Celsius
- Luminous flux: > 2000 lm/m; 1200 m/m; 900 lm/m
- Color uniformity ≤ 2 SDCM
- Lifetime up to 60.000 h L80B10; LM80 and LM79
- Large selection of color temperatures: 2400 K – 5000 K; CRI 80, CRI 90
- Dimmable by OPTOTRONIC LED driver from 0 % to 100 %
- Designed in Italy, made in Germany
- Durable, coated aluminum profile resistant to harsh environments: AMA

Avantages produits

- 15 lengths available to adapt to all conditions
- Easy to configure the desired light performance for optimal illumination
- Protected against the atmospheric agents: from the desert to the glacier
- Long-time functionality and maintenance-free
- High color fidelity to beautify every design
- Fully controllable by most used light control protocols: DALI, DMX
- Color consistent with LINEARlight FLEX products
- Several installation accessories available



Fiche de données produit

Domaines d'application

- Wall Grazing
- Ambient lighting
- Wall washing
- Éclairage de voûtes
- Architectural integration

Fiche technique

Information produit

Référence de commande	LR-P-2000-927-1
-----------------------	-----------------

Données électriques

Tension nominale	240 V
Accidental reverse input voltage protection up to	25 V

Données photométriques

Temp. de couleur	2700 K
Flux lumineux	3300 lm
Intensité lumineuse	5300 cd
Teinte de couleur (désignation)	Blanc
Ra Indice de rendu des couleurs	> 90
Rendement du luminaire	0,76
Efficacité lumineuse	76 lm/W
Temp. de couleur	2700 K

Données photométriques

Angle de rayonnement	10 °
----------------------	------

Dimensions & poids



Longueur	00 mm
Largeur	250 mm
Hauteur	330 mm
Poids du produit	150000 g
Poids du produit	0

Fiche de données produit

Couleurs & matériaux

Matériau de corps	Aluminium
Couleur du produit	Noir
Matériau de fermeture	Polycarbonate (PC)

Température

Plage de température ambiante	-30...+50 °C
-------------------------------	--------------

Durée de vie

Durée de vie	60000 h
--------------	---------

Capacités

Gradable	Oui
----------	-----

Certificats & Normes

Type de protection	IP67
--------------------	------

Classements spécifiques à chaque pays

Référence de commande	LR-P-2000-927-1
-----------------------	-----------------


Données logistiques

Nomenclature douanière	94051190900
------------------------	-------------


Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	27-05-2022
Primary Article Identifier	4062172144896
Declaration No. in SCIP database	In work


Distribution de lumière

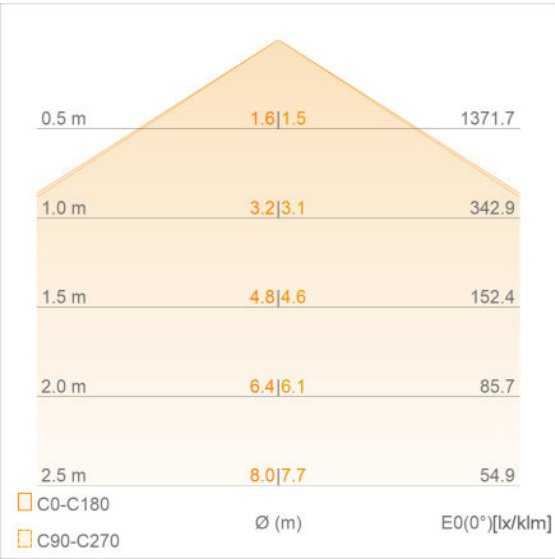


LRF-930-120D-G1 Illuminance Cone Diagram

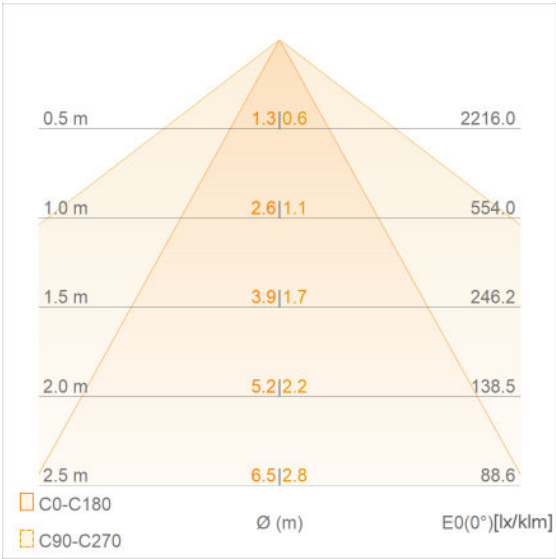

LRF-930-90T-G1 Illuminance Cone Diagram

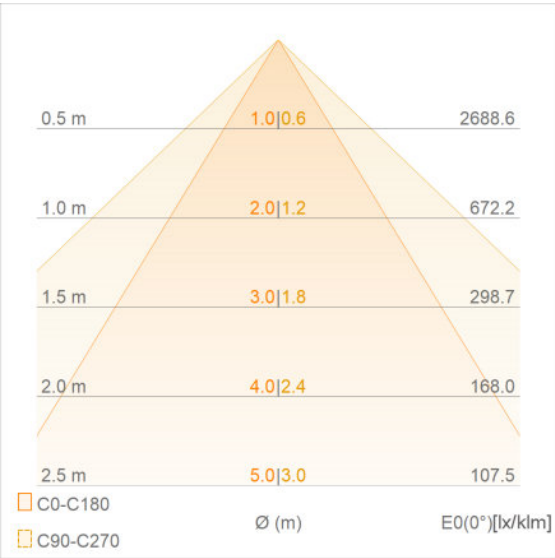


LRF-930-60S-G1 Illuminance Cone Diagram

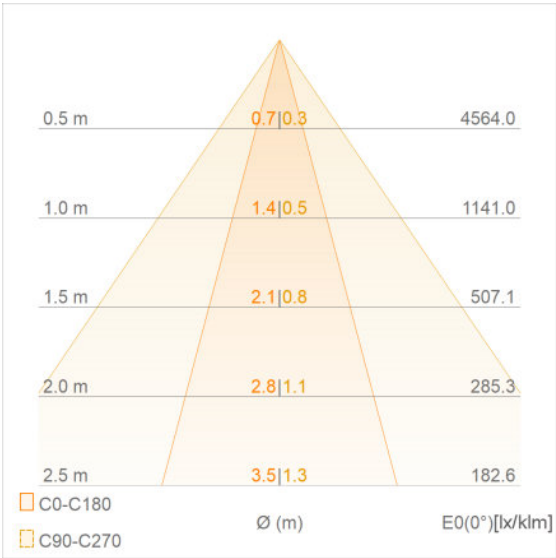


LRF-930-30S-G1 Illuminance Cone Diagram


Fiche de données produit

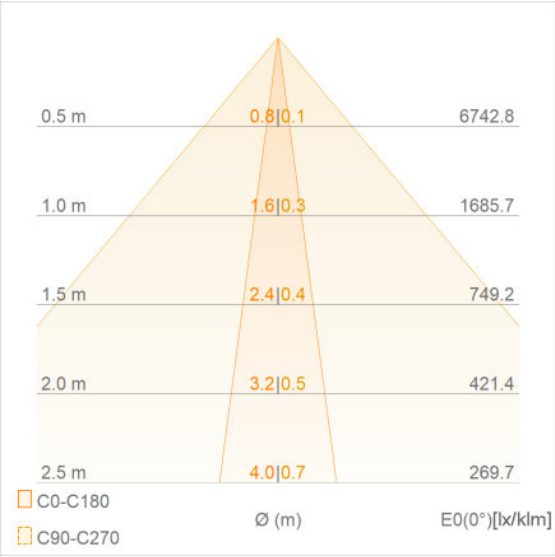

LRF-930-10S G1 Illuminance Cone Diagram

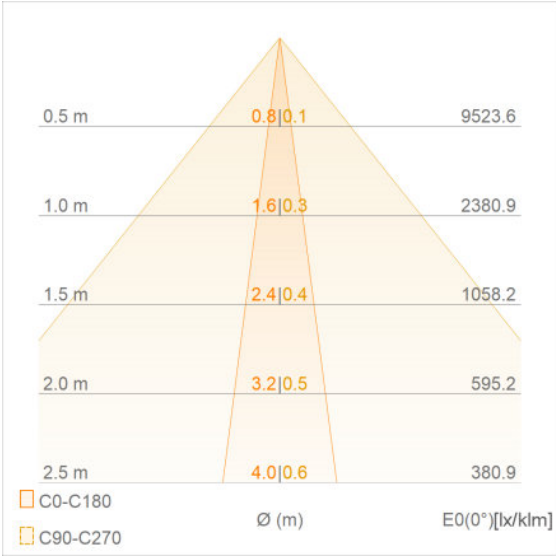

LRF-930-10B-G1 Illuminance Cone Diagram

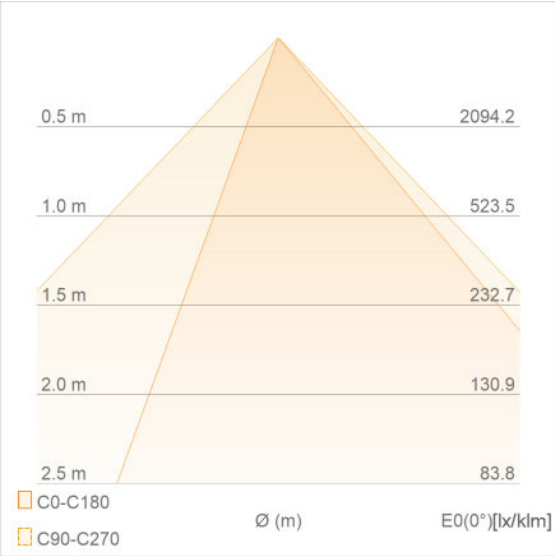

LRF-930-WW-G1 Illuminance Cone Diagram

Données de téléchargement

Dossier

Fiche de données produit

	User instruction FINESSE
	User instruction FINESSE RGB RGBW
	Fiche technique produit LINEARlight RIGID FINESSE (EN)
	Fiche technique produit LINEARlight RIGID FINESSE RGB (W) (EN)
	Brochures Light is awesome - LINEARlight Rigid FINESSE (EN)
	Déclaration de Conformité Finesse LR P fixed CB 04032022
	Déclaration de Conformité Finesse LR P fixed D 04032022
	Déclaration de Conformité Finesse LR P fixed ENEC
	Déclaration de Conformité Finesse LR P floodligh CB 04032022
	Déclaration de Conformité Finesse LR P floodligh D 04032022
	Déclaration de Conformité Finesse LR P floodligh ENEC 04032022
	CAD data LRF-P-2000-ABC-XX-YY-02-ZZ-G1 STEP 070420
	CAD data 3-dim LRF-P-2000-ABC-XX-YY-03-ZZ-G1 STEP 070420
	CAD data 3-dim LRF-P-2000-ABC-XX-YY-04-ZZ-G1 STEP 070420
	CAD data 3-dim LRF-P-2000-ABC-XX-YY-05-ZZ-G1 STEP 070420
	CAD data 3-dim LRF-P-2000-ABC-XX-YY-06-ZZ-G1 STEP 070420
	CAD data 3-dim LRF-P-2000-ABC-XX-YY-07-ZZ-G1 STEP 070420
	CAD data 3-dim LRF-P-2000-ABC-XX-YY-08-ZZ-G1 STEP 070420
	CAD data 3-dim LRF-P-2000-ABC-XX-YY-09-ZZ-G1 STEP 070420
	CAD data 3-dim LRF-P-2000-ABC-XX-YY-10-ZZ-G1 STEP 070420
	CAD data 3-dim LRF-P-2000-ABC-XX-YY-11-ZZ-G1 STEP 070420
	CAD data 3-dim LRF-P-2000-ABC-XX-YY-12-ZZ-G1 STEP 070420
	CAD data 3-dim LRF-P-2000-ABC-XX-YY-13-ZZ-G1 STEP 070420

Fiche de données produit

	CAD data 3-dim LRF-P-2000-ABC-XX-YY-14-ZZ-G1
	CAD data 3-dim LRF-P-2000-ABC-XX-YY-15-ZZ-G1
	Eulumdat LR-x-2000-930-10B-xx-10-xx-G1 LTD
	Eulumdat LR-x-2000-930-10S-xx-10-xx-G1 LTD
	Eulumdat LR-x-2000-930-120D-xx-10-xx-G1 LTD
	Eulumdat LR-x-2000-930-30S-xx-10-xx-G1 LTD
	Eulumdat LR-x-2000-930-60S-xx-10-xx-G1 LTD
	Eulumdat LR-x-2000-930-90T-xx-10-xx-G1 LTD
	Eulumdat LR-x-2000-930-WW-xx-10-xx-G1 LTD
	IES data LR-x-2000-930-10B-xx-10-xx-G1 IES
	IES data LR-x-2000-930-10S-xx-10-xx-G1 IES
	IES data LR-x-2000-930-120D-xx-10-xx-G1 IES
	IES data LR-x-2000-930-30S-xx-10-xx-G1 IES
	IES data LR-x-2000-930-60S-xx-10-xx-G1 IES
	IES data LR-x-2000-930-90T-xx-10-xx-G1 IES
	IES data LR-x-2000-930-WW-xx-10-xx-G1 IES

Fiche de données produit

Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Données logistiques

Code produit	Description produit	Unité d'emballage (Pièces/Unité)	Dimensions (longueur x largeur x hauteur)	Volume	Poids brut
4062172144896	LR-P-2000 -927-10S-BK- 15-TB-G1	Carton de regroupement 6	1638 mm x 121 mm x 111 mm	22.00 dm ³	10043.00 g

Le code produit mentionné décrit la petite quantité d'unité qui peut être commandée. Une unité peut contenir un ou plusieurs produits. Lorsque vous passez la commande, merci de bien vouloir entrer une unité ou un multiple d'une unité.

Avertissement

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.