

## LR-P-400 -RGB-10S-BK-15-TB-G1 2L

LINEARlight Rigid FINESSE |



### Caractéristiques produit

- Slim, modular LED fixture for linear applications, fully customizable
- Several optics, Wall Grazing and WallWashing; 10°, 30°, 60°
- Outdoor IP67 or Indoor IP43 versions available
- Large operating temperature range: from -30 ° to +50 ° Celsius
- Luminous flux: > 2000 lm/m; 1200 m/m; 900 lm/m
- Color uniformity  $\leq 2$  SDCM
- Lifetime up to 60.000 h L80B10; LM80 and LM79
- Large selection of color temperatures: 2400 K – 5000 K; CRI 80, CRI 90
- Dimmable by OPTOTRONIC LED driver from 0 % to 100 %
- Designed in Italy, made in Germany
- Durable, coated aluminum profile resistant to harsh environments: AMA

### Avantages produits

- 15 lengths available to adapt to all conditions
- Easy to configure the desired light performance for optimal illumination
- Protected against the atmospheric agents: from the desert to the glacier
- Long-time functionality and maintenance-free
- High color fidelity to beautify every design
- Fully controllable by most used light control protocols: DALI, DMX
- Color consistent with LINEARlight FLEX products
- Several installation accessories available



## Fiche de données produit

---

### Domaines d'application

- Wall Grazing
- Ambient lighting
- Wall washing
- Éclairage de voûtes
- Architectural integration

Fiche de données produit

Fiche technique

Information produit

|                       |                 |
|-----------------------|-----------------|
| Référence de commande | LR-P-400-RGB-10 |
|-----------------------|-----------------|

Données électriques

|                                                   |      |
|---------------------------------------------------|------|
| Accidental reverse input voltage protection up to | 25 V |
|---------------------------------------------------|------|


Données photométriques

|                                 |                 |
|---------------------------------|-----------------|
| Flux lumineux                   | 650 lm          |
| Teinte de couleur (désignation) | Rouge/Vert/Bleu |

Données photométriques

|                      |      |
|----------------------|------|
| Angle de rayonnement | 10 ° |
|----------------------|------|

Dimensions & poids

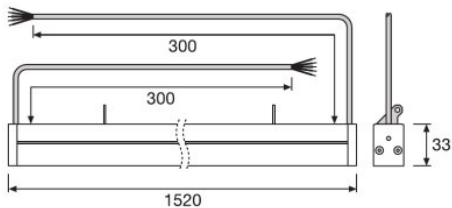

|                  |          |
|------------------|----------|
| Longueur         | 00 mm    |
| Hauteur          | 330 mm   |
| Poids du produit | 150000 g |
| Poids du produit | 0        |

Couleurs & matériaux

|                       |                    |
|-----------------------|--------------------|
| Matériau de corps     | Aluminium          |
| Couleur du produit    | Gris               |
| Matériau de fermeture | Polycarbonate (PC) |

Température

|                               |              |
|-------------------------------|--------------|
| Plage de température ambiante | -20...+50 °C |
|-------------------------------|--------------|

Fiche de données produit

Capacités

|                          |     |
|--------------------------|-----|
| Orientable               | Non |
| Gradable                 | Oui |
| Gestion de couleur (RGB) | Oui |
| Technologie LIGHTIFY     | Non |

Certificats & Normes

|                    |      |
|--------------------|------|
| Type de protection | IP67 |
|--------------------|------|

Classements spécifiques à chaque pays

|                       |                 |
|-----------------------|-----------------|
| Référence de commande | LR-P-400-RGB-10 |
|-----------------------|-----------------|

Données logistiques

|                        |             |
|------------------------|-------------|
| Nomenclature douanière | 94051190900 |
|------------------------|-------------|

Environmental information

| Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH) |               |
|-----------------------------------------------------------------------|---------------|
| Date of Declaration                                                   | 28-06-2022    |
| Primary Article Identifier                                            | 4062172226998 |
| Declaration No. in SCIP database                                      | In work       |

Données de téléchargement

| Dossier                                                                             |                                                                   |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------|
|  | User instruction<br>FINESSE                                       |
|  | User instruction<br>FINESSE RGB RGBW                              |
|  | Fiche technique produit<br>LINEARlight RIGID FINESSE (EN)         |
|  | Fiche technique produit<br>LINEARlight RIGID FINESSE RGB (W) (EN) |
|  | Brochures<br>Light is awesome - LINEARlight Rigid FINESSE (EN)    |
|  | Déclaration de Conformité<br>Finesse LR P fixed CB 04032022       |
|  | Déclaration de Conformité<br>Finesse LR P fixed D 04032022        |
|  | Déclaration de Conformité<br>Finesse LR P fixed ENEC              |

Fiche de données produit

|                                                                                   |                                                                   |
|-----------------------------------------------------------------------------------|-------------------------------------------------------------------|
|  | Déclaration de Conformité<br>Finesse LR P floodligh CB 04032022   |
|  | Déclaration de Conformité<br>Finesse LR P floodligh D 04032022    |
|  | Déclaration de Conformité<br>Finesse LR P floodligh ENEC 04032022 |

Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Données logistiques

| Code produit  | Description produit                  | Unité d'emballage<br>(Pièces/Unité) | Dimensions (longueur x<br>largeur x hauteur) | Volume                | Poids brut |
|---------------|--------------------------------------|-------------------------------------|----------------------------------------------|-----------------------|------------|
| 4062172226998 | LR-P-400 -RGB-10S-BK-<br>15-TB-G1 2L | Carton de regroupement<br>6         | 1638 mm x 121 mm x 111<br>mm                 | 22.00 dm <sup>3</sup> | 10043.00 g |

Le code produit mentionné décrit la petite quantité d'unité qui peut être commandée. Une unité peut contenir un ou plusieurs produits. Lorsque vous passez la commande, merci de bien vouloir entrer une unité ou un multiple d'une unité.

Avertissement

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.