

BackLED and BoxLED mounting profiles

Accessoires pour modules LED pour la publicité et le rétro-éclairage



Caractéristiques produit

- Support de montage d'utilisation universelle pour caissons lumineux simple ou double face
- Longueur totale : 2 000 mm

Avantages produits

- Peut être facilement raccourci à n'importe quelle longueur
- Montage rapide et facile du support avec des vis autotaraudeuses ou de rivets aveugles
- Encliquetage rapide et simple des modules de LED, sans outil
- Solide profilé en aluminium

Domaines d'application

- Enseigne et lettrage


Fiche de données gamme de produits

Fiche technique

Dimensions & poids

Description produit	Poids du produit
BA -SM-MP	180,00 g

Ligne de produits dessiné avec des nombres

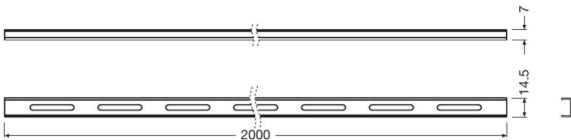

BA -SM-MP

Données logistiques

Description produit	Nomenclature douanière
BA -SM-MP	76169990990

Environmental information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)

Description produit	Date of Declaration	Primary Article Identifier	Candidate List Substance 1
BA -SM-MP	18-02-2022	4052899264540	No declarable substances contained

Fiche de données gamme de produits

Description produit	Declaration No. in SCIP database
BA -SM-MP	No declarable substances contained

Conseil d'application

Pour plus d'informations sur les applications et les graphiques, veuillez vous référer à la fiche de données produit.

Support de vente et support technique

Support de vente et support technique www.osram.fr

Données de téléchargement

Dossier	
	CAD data 652650_CAD Daten MS Plus G15 mounting profile_IGS
	CAD data 652651_CAD Daten MS Plus G15 mounting profile_STEP
	CAD data PDF 652657_CAD Daten MS Plus G15 mounting profile_pdf

Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Fiche de données gamme de produits

Données logistiques

Code produit	Description produit	Unité d’emballage (Pièces/Unité)	Dimensions (longueur x largeur x hauteur)	Volume	Poids brut
4052899264540	BA -SM-MP	Carton de regroupement 24	2020 mm x 64 mm x 43 mm	5.56 dm ³	4536.00 g

Le code produit mentionné décrit la petite quantité d’unité qui peut être commandée. Une unité peut contenir un ou plusieurs produits. Lorsque vous passez la commande, merci de bien vouloir entrer une unité ou un multiple d’une unité.

Avertissement

Sous réserve de modifications. Sauf erreur ou omission. Veuillez à toujours utiliser la version la plus récente.