

LF1100TW-G5 -927.957-09 L2

LINEARlight FLEX Tunable White IP00 | Modules linéaires LED pour des solutions d'éclairage flexibles et individualisées



Caractéristiques produit

- 24 V LED strips flexible and cuttable
- Up to 60,000 h L90/B10 with SDT technology, tested acc. to IEC 62717 on real LED strips
- Adjustable color temp. via Tunable White: 2200...3500 K, 2500...4000 K, 2700...5700 K CRI90
- Adjustable color temp. via Tunable White: 2200...3500 K, 2500...3500 K, 2700...6500 K CRI80
- CRI80, CRI90 options available
- Stable light flux over length: active constant current regulators (ICs), PWM safe
- Embedded automatic quick protection against accidental miswiring up to 25 V
- Fully PWM dimmable from zero up to 2.5 kHz, audible noise free, suitable for quite places
- Designed, engineered and manufactured and tested in Italy (ISO9001, ISO 17025, ACCREDIA, VDE)

Avantages produits

- Color uniformity better than 3 SDCM on the entire LED strip and between strips
- LED lifetime acc.to IES LM-80 and IES TM-21 standards, and also internal OSRAM LAB tests
- Excellent robustness: single reel manufacturing technology (no solder joints on strip)
- Montage facile sur de nombreuses surfaces lisses grâce à une bande autocollante située au dos
- Design extraordinaire et matériaux de haute qualité
- Pre-soldered wires

Domaines d'application

- Éclairage de voûtes
- Éclairage de commerces
- Bureaux



Fiche de données produit

Fiche technique


Données électriques

Tension nominale	24,0 V
Type de courant	Courant direct (DC)
Puissance nominale par mètre	9,8 W
Puissance nominale	88,40 W
Plage de tension	23...25 V
Accidental reverse input voltage protection up to	25 V

Données photométriques

Couleur de la LED	Dynamic White
Temp. de couleur	2700...5700 K
Ra Indice de rendu des couleurs	90
Flux lumineux par mètre	1156 lm
Efficacité lumineuse	118 lm/W
Ecart-type de correspondance de couleur	≤3 sdc _m
Teinte de couleur (désignation)	2700...5700 K
Temp. de couleur	3800 K

Dimensions & poids

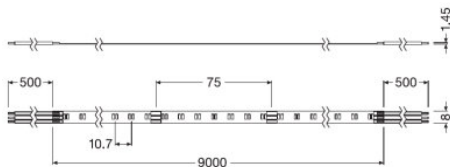

Longueur	9000,0 mm
Longueur de câble	500,0
Poids du produit	104,00 g
Section du câble au primaire	0,5 mm ²
Largeur	8,00 mm
Hauteur	1,40 mm

Température

Fiche de données produit

Plage de température au point Tc	-20...+85 °C ¹⁾
Plage de température de stockage	-40...85 °C

¹⁾ Exceeding the maximum ratings will reduce expected life time or destroy the LED strip.

Donnée produit supplémentaire

Code EAN de remplacement	4062172032667, 4062172032643
ID of contained light source [AGGR]	LS_TRV_286063

Certificats & Normes

Normes	CE/ENEC/EAC
Energy efficiency class of the contained light source	F

Données logistiques

Nomenclature douanière	85395100000
------------------------	-------------

Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	09-06-2023
Primary Article Identifier	4062172189293
Candidate List Substance 1	Lead
CAS No. of substance 1	7439-92-1
Safe Use Instruction	The identification of the Candidate List substance is sufficient to allow safe use of the article.
Declaration No. in SCIP database	1e4aef2d-5fd2-4940-9779-142c985ead14

Technique / Accessoires

- Raccordement simplifié grâce au système d'appariement optionnel CONNECTsystem
- Perfectly matched with OTi DALI 50/80 4CH DT6/8 and OTi DALI 160 2CH DT6/8
- Perfectly matched with OTi BLE 80/220-240/24 4CH

Texte de la feuille de

- not relevant
- not relevant
- not relevant
- Avoid installations in rural and urban areas with high industrial activity and heavy traffic (higher than class than 4C1 according IEC 60721-3) and as well as installation in spa, areas with chlorine atmosphere, direct exposure to blown sand.

Données de téléchargement

Fiche de données produit

Dossier	
	User instruction LINEARlight FLEX, Tunable White
	Fiche technique produit LINEARlight Flex Tunable White CRI90 Specification Sheet (EN)
	Brochures Light is freedom of design (EN)
	Déclaration de Conformité VDE ENEC CERTIFICATE 40052516 160823
	Déclaration de Conformité LF(P) TW G5 CB 180121
	Déclarations de conformité LR FLEX TW2 CE 4249165 02 020823
	Eulumat LF1100TW-G5-927.957-09 L2 LTD 130421
	IES data LF1100TW-G5-927.957-09 L2 IES 130421

Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Données logistiques

Code produit	Description produit	Unité d'emballage (Pièces/Unité)	Dimensions (longueur x largeur x hauteur)	Volume	Poids brut
4062172189293	LF1100TW-G5 -927.957- 09 L2	Carton de regroupement 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1765.00 g

Fiche de données produit

Données logistiques

Le code produit mentionné décrit la petite quantité d'unité qui peut être commandée. Une unité peut contenir un ou plusieurs produits. Lorsque vous passez la commande, merci de bien vouloir entrer une unité ou un multiple d'une unité.

Accessoires optionnels

Description produit	Nom de l'accessoire	Code de l'accessoire
LF1100TW-G5 -927.957-09 L2	CORNER-FLEX -4P-003 KIT 10PCS	▶ 4062172179638
LF1100TW-G5 -927.957-09 L2	CORNER-FLEX -4P-015 KIT 10PCS	▶ 4062172179676
LF1100TW-G5 -927.957-09 L2	CONN-FLEX -3P-050 KIT 10PCS	▶ 4062172179690
LF1100TW-G5 -927.957-09 L2	CONN-FLEX -3P-200 KIT 10PCS	▶ 4062172179720
LF1100TW-G5 -927.957-09 L2	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300
LF1100TW-G5 -927.957-09 L2	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
LF1100TW-G5 -927.957-09 L2	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
LF1100TW-G5 -927.957-09 L2	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
LF1100TW-G5 -927.957-09 L2	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
LF1100TW-G5 -927.957-09 L2	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF1100TW-G5 -927.957-09 L2	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046

Avertissement

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.