

RGB 4pin LINEARlight Flex IP67 Connector

Accessoires pour les bandes LED flexibles

Caractéristiques produit

- Quick and easy installation
- Compatible with TEC Flex



Avantages produits

- Installation simple, ni outils, ni soudure nécessaires (CONNECTsystem)
- Durée d'installation réduite (CONNECTsystem)
- Peut être connecté à l'avant du module ou aux points de division (CONNECTsystem)
- De faible profondeur (CONNECTsystem)


Fiche de données gamme de produits

Fiche technique

Description produit	Dimensions & poids		Donnée produit supplémentaire		Données logistiques
	Longueur	Poids du produit	Code EAN de remplacement	Code EAN de remplacement	Nomenclature douanière
LF -4CONN Protect	300 mm	2000 g	4062172016452	4008321977090	85444290900
LF -ENDCAP Protect	137 mm	050 g	4062172016438	4008321977106	39269097900
LF -4PIN Protect - Installation Kit	300 mm	2000 g	4062172016490	4008321977076	854442909000

Description produit	Environmental information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)		
	Date of Declaration	Primary Article Identifier	Declaration No. in SCIP database
LF -4CONN Protect	26-04-2024	4062172016452	In work
LF -ENDCAP Protect	06-01-2023	4062172016438	In work
LF -4PIN Protect - Installation Kit	30-08-2022	4008321977076 4062172016490	In work

Fiche de données gamme de produits

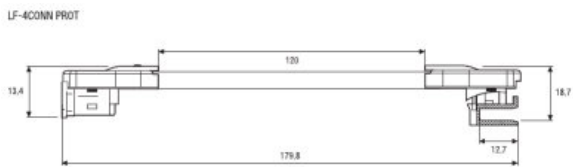


324203_LF-4CONN PROT



329588_LF-ENDCAP PROT



324488_LF-4PIN PROT

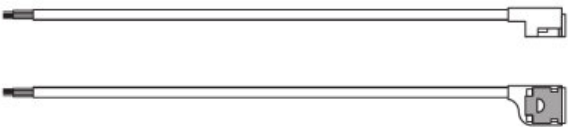

327681_LF-4PIN-PROT

Conseil d'application

Pour plus d'informations sur les applications et les graphiques, veuillez vous référer à la fiche de données produit.

Support de vente et support technique

Support de vente et support technique www.osram.fr

Données de téléchargement

Dossier	
	Brochures Light is freedom of design (EN)
	Brochures CONNECTION System for LINEARlight FLEX and TEC Flex IP00 - Quick installation guide

Fiche de données gamme de produits

Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Données logistiques

Code produit	Description produit	Unité d'emballage (Pièces/Unité)	Dimensions (longueur x largeur x hauteur)	Volume	Poids brut
4062172016452	LF -4CONN Protect	Carton de regroupement 10	230 mm x 150 mm x 340 mm	11.73 dm ³	625.00 g
4062172016438	LF -ENDCAP Protect	Carton de regroupement 10	338 mm x 140 mm x 141 mm	6.67 dm ³	260.00 g
4062172016490	LF -4PIN Protect - Installation Kit	Carton de regroupement 10	570 mm x 150 mm x 340 mm	29.07 dm ³	1097.00 g

Le code produit mentionné décrit la petite quantité d'unité qui peut être commandée. Une unité peut contenir un ou plusieurs produits. Lorsque vous passez la commande, merci de bien vouloir entrer une unité ou un multiple d'une unité.

Avertissement

Sous réserve de modifications. Sauf erreur ou omission. Veuillez à toujours utiliser la version la plus récente.