

Corner surface slim profile 19x19 mm

Accessoires pour les bandes LED flexibles

Caractéristiques produit

- Compatible with TEC Flex



Avantages produits

- Profilé en aluminium robuste et anti-corrosion grâce à un traitement d'anodisation


Fiche de données gamme de produits

Fiche technique


	Dimensions & poids		Données logistiques	Environmental information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)
Description produit	Longueur	Poids du produit	Nomenclature douanière	Date of Declaration
FX-QMS-G1 -EFGP-T45D19H19	26,0 mm	0,80 g	39269097900	30-08-2022
FX-QMS-G1 -BMZI-T45D19H19	20,0 mm	1,43 g	76169990990	30-08-2022
FX-QMS-G1 -EFGH-T45D19H19	19,0 mm	1,00 g	39269097900	11-02-2022
FX-QMS-G1 -CFDB-300	3000 mm	51,75 g	39169050900	30-08-2022
FX-QMS-G1 -CFTL-300	3000 mm	58,50 g	39269097900	11-02-2022

Description produit	Primary Article Identifier	Candidate List Substance 1	Declaration No. in SCIP database
FX-QMS-G1 -EFGP-T45D19H19	4052899450028	No declarable substances contained	No declarable substances contained
FX-QMS-G1 -BMZI-T45D19H19	4052899446960	No declarable substances contained	No declarable substances contained
FX-QMS-G1 -EFGH-T45D19H19	4052899999862	No declarable substances contained	No declarable substances contained
FX-QMS-G1 -CFDB-300	4052899446991	No declarable substances contained	No declarable substances contained
FX-QMS-G1 -CFTL-300	4052899999749	No declarable substances contained	No declarable substances contained


Fiche de données gamme de produits

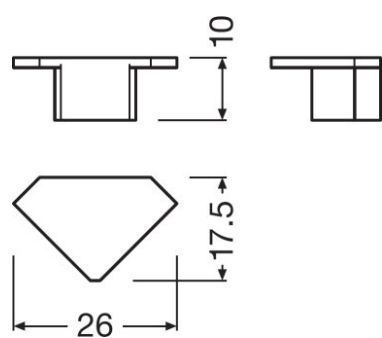


729009_FX-QMS-G1-EFGP-T45D19H19

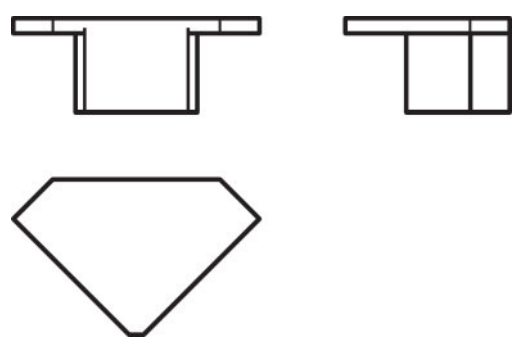

729077_FX-QMS-G1-EFGP-T45D19H19

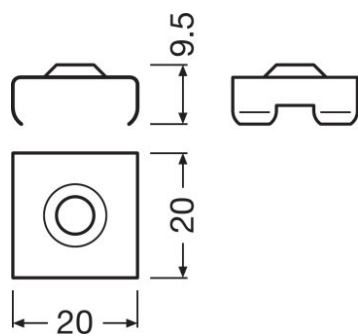

729003_FX-QMS-G1-BMZI-T45D19H19

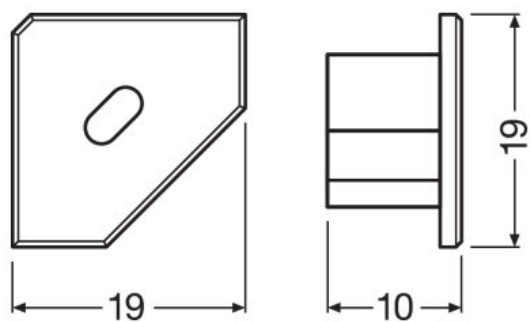

FX-QMS-G1-EFGH-T45D19H19




729001_FX-QMS-G1-CFDB-300



729069_FX-QMS-G1-CFDB-300

Fiche de données gamme de produits



FX-QMS-G1-CFTL-300

Conseil d'application

Pour plus d'informations sur les applications et les graphiques, veuillez vous référer à la fiche de données produit.

Support de vente et support technique

Support de vente et support technique www.osram.fr

Données de téléchargement

Dossier	
	Fiche technique produit Specification Sheet Slim Track FX-QMS-G1-T45D19H19-300 (EN)
	Brochures Light is freedom of design (EN)
	Fiche technique produit Specification Sheet Slim Track FX-QMS-G1-TU15H6-300 (EN)
	Fiche technique produit Specification Sheet Slim Track FX-QMS-G1-TU15H6W3-300 (EN)
	Fiche technique produit Specification Sheet Slim Track FX-QMS-G1-TU16H12LS-300 (EN)
	Fiche technique produit Specification Sheet Slim Track FX-QMS-G1-TU16H12W3-300 (EN)
	Fiche technique produit Specification Sheet Slim Track FX-QMS-G1-TU16H12-300 (EN)
	Fiche technique produit Specification Sheet Wide Profile FX-QMS-G1-TR19H16-300

Fiche de données gamme de produits

Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Données logistiques

Code produit	Description produit	Unité d'emballage (Pièces/Unité)	Dimensions (longueur x largeur x hauteur)	Volume	Poids brut
4052899450028	FX-QMS-G1 -EFGP- T45D19H19	Carton de regroupement 400	175 mm x 145 mm x 110 mm	2.79 dm ³	426.00 g
4052899446960	FX-QMS-G1 -BMZI- T45D19H19	Carton de regroupement 400	175 mm x 145 mm x 110 mm	2.79 dm ³	676.00 g
4052899999862	FX-QMS-G1 -EFGH- T45D19H19	Carton de regroupement 400	175 mm x 145 mm x 100 mm	2.54 dm ³	506.00 g
4052899446991	FX-QMS-G1 -CFDB-300	Carton de regroupement 40	3060 mm x 225 mm x 225 mm	154.91 dm ³	3293.00 g
4052899999749	FX-QMS-G1 -CFTL-300	Carton de regroupement 40	3020 mm x 80 mm x 30 mm	7.25 dm ³	2880.00 g

Le code produit mentionné décrit la petite quantité d'unité qui peut être commandée. Une unité peut contenir un ou plusieurs produits. Lorsque vous passez la commande, merci de bien vouloir entrer une unité ou un multiple d'une unité.

Avertissement

Sous réserve de modifications. Sauf erreur ou omission. Veuillez à toujours utiliser la version la plus récente.